

PE FUSE-ON TOWING HEADS




Our Fuse-On Towing Heads are machined from solid polyethylene rod.

They have a sealed eyebolt to keep the inside of the pipe clean and three steps at the back. This allows for trimming down for butt fusion to SDR17.6, SDR11 or SDR9 pipe.

FEATURES


- Simple to use – butt fuse to the pipe to give a reliable, sealed, pulling method.
- Saw off (with a length of pipe) ready to use again.
- Machined from solid polyethylene for high strength.
- Drop forged, high tensile alloy steel eyebolt for superior attachment.
- Rear stepped design allows for trimming back to suit SDR 17.6, 11 & 9.

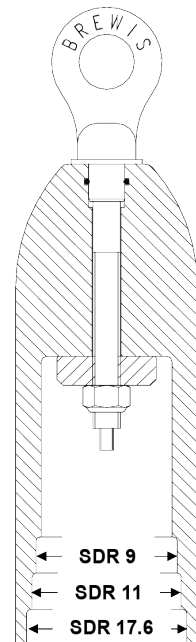

AUSTRALIA
03 9068 5688
 +61 3 9068 5688
 sales@blick.group
 www.blick.group

NEW ZEALAND
07 849 2366
 +64 7 849 2366
 sales@blick.group
 www.blick.group



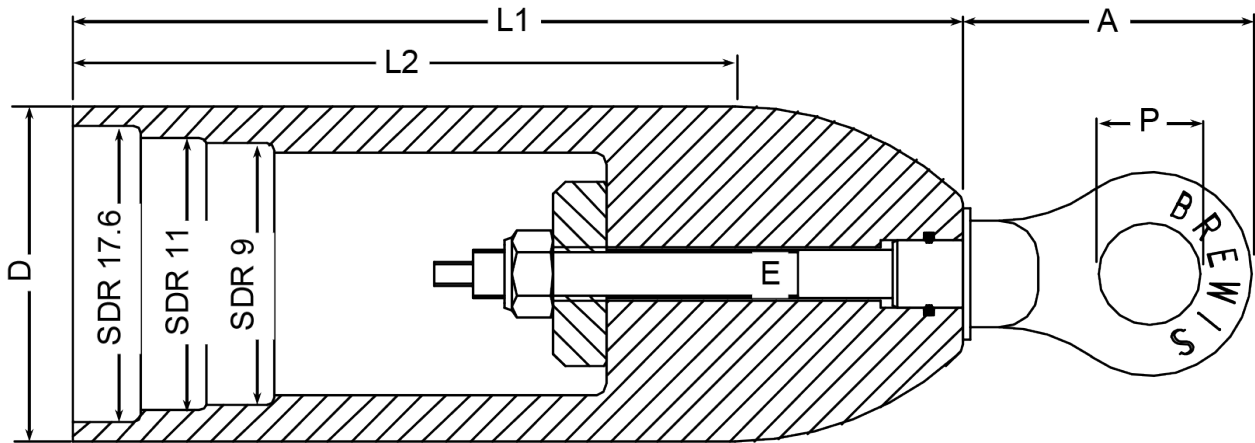

Part No.	D	L1	L2	A	SDR 17	SDR 11	SDR 9	P	E	Weight (kg)
4-54050	50mm	165	131	50	Not on 50mm	Not on 50mm	39	Ø19	3/8"W	0.5
4-54063	63mm	200	149	60	Not on 63mm	Not on 63mm	49	Ø30	1/2"W	0.8
4-54075	75mm	200	149	60	Not on 75mm	Not on 75mm	58	Ø30	1/2"W	1.0
4-54090	90mm	250	189	110	79	74	70	Ø38	3/4"W	2.5
4-54110	110mm	330	255	110	97	90	85	Ø38	3/4"W	3.5
4-54125	125mm	330	248	110	110	102	97	Ø38	3/4"W	4.0
4-54140	140mm	330	235	110	123	115	109	Ø38	3/4"W	5.0
4-54160	160mm	330	221	150	141	131	124	Ø44	1"W	8.0
4-54180	180mm	330	203	150	159	147	140	Ø44	1"W	9.3
4-54200	200mm	330	185	150	176	164	155	Ø44	1"W	10.5
4-54225	225mm	500	332	150	199	184	174	Ø44	1"W	19.0
4-54250	250mm	500	310	150	220	205	194	Ø44	1"W	23.0
4-54280	280mm	500	283	150	247	229	217	Ø44	1"W	26.0
4-54315	315mm	500	297	270	278	258	245	Ø60x95	50.8x6 *	46.0
4-54355	355mm	500	333	270	313	290	276	Ø60x95	50.8x6 *	52.0
4-54400	400mm	500	324	260	353	327	310	Ø60x95	50.8x6 *	57.0
4-54450	450mm	500	318	260	397	368	350	Ø60x95	50.8x6 *	46.2
4-54500	500mm	500	258	260	440	409	388	Ø60x95	50.8x6 *	66.5
4-54560	560mm	500	258	260	494	458	435	Ø60x95	50.8x6 *	
4-54630	630mm	700	408	450	555	516	489	Ø80x110	76.2x6**	
4-54710	710mm	700	350	450	626	581	550	Ø80x110	76.2x6**	

Black PE300, Density 0.95g/cm³, Yield Strength 28N/mm², Melting Point 127°C

* Supplied with 17T Dee Shackle

** Supplied with 35T Dee Shackle or upgraded to 55T Bow

Brewis reserves the right to amend the specifications without notice. E&OE.

AUSTRALIA
03 9068 5688
 +61 3 9068 5688
 sales@blick.group
 www.blick.group

NEW ZEALAND
07 849 2366
 +64 7 849 2366
 sales@blick.group
 www.blick.group

